



VERGOKAN CLICKABLE TRAY

DESIGNED FOR QUICK &
REDUCED INSTALLATION COSTS

THE NEW GENERATION OF CLICKABLE CABLE TRAYS

The unique 'click' and forget design saves you time and installation hassle and offers excellent alignment.

This innovative solution is strong and reliable, but mostly stands out for its simplicity. The cable trays click into each other without tools, bolts or nuts. Available in 100mm, 150 and 300mm widths suitable for a wide range of applications.



Carparks



Commercial Buildings



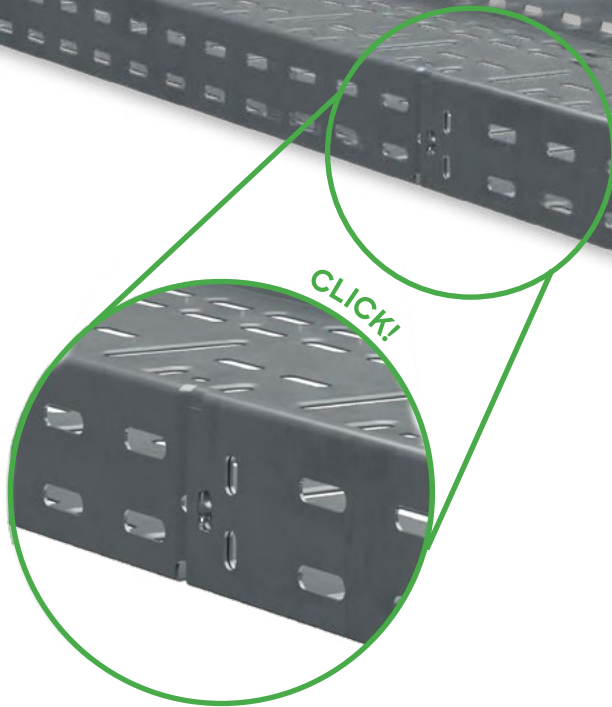
Exhibition Halls



Data Centres



Watch how the
Vergokan Tray
works now!



► **Rapid installation**

by quick alignment and
click in position

► **Lower installation costs**

with immediate time savings during
installation

► **Perforated pattern**

for extra stability, better cooling and
many options to tie cables

► **Strong and Robust**

with a load rating capacity of
75kg/m at 2m spans

► **Wide range of accessories**





provides a solution for
many applications

► **Galvabond finish (GB)**


for an aesthetic look and
smooth finish



Ordering Guide

	MAT NO.	CAT NO.	DESCRIPTION
Tray			
	4041158	VCT.100	CLICKABLE TRAY 100MM WIDE – 3M LENGTH GB
	4041159	VCT.150	CLICKABLE TRAY 150MM WIDE – 3M LENGTH GB
	4041161	VCT.300	CLICKABLE TRAY 300MM WIDE – 3M LENGTH GB
Bend			
	4042151	VCTB90.100K	90° 100MM WIDE BEND KIT GB
	4042150	VCTB90.150K	90° 150MM WIDE BEND KIT GB
	4042152	VCTB90.300K	90° 300MM WIDE BEND KIT GB
Tee			
	4042153	VCTTEE.100K	90° 100MM WIDE TEE KIT GB
	4042154	VCTTEE.150K	90° 150MM WIDE TEE KIT GB
	4042155	VCTTEE.300K	90° 300MM WIDE TEE KIT GB
Accessories			
	4042156	VCTPARTK	SNAP-IN PARTITION KIT 3M GB
	4042157	VCTFJ60K	FAST JOINING SPLICE PLATE KIT GB

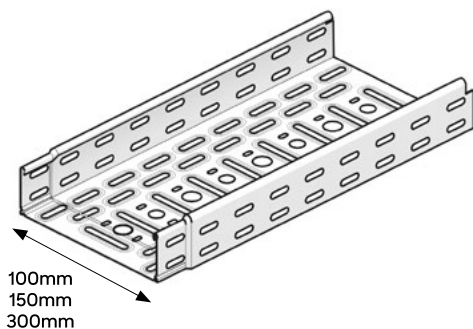Dimensions



200mm and 400mm wide available along with other accessories; internal and external riser shapes, covers as well as hinged splice plate kits.

Load Rating & Deflection

Deflections mm	10mm	20mm	25mm	35mm
Span 1.5 meters				
Span 2.0 meters				
Span 2.4 meters				
Span 3.0 meters				
Allowable Load	125kg/m	75kg/m	50kg/m	35kg/m

Note: The deflections have been provided as a guide based on CONTINUOUS spans.

For more information, visit our website or contact customer service on

1300 ATKORE (285 673) | atkore.com.au

Atkore™
Unistrut ▲ Flexicon